


### 387/11 nm BrightLine® single-band bandpass filter

Part Number: FF01-387/11-25

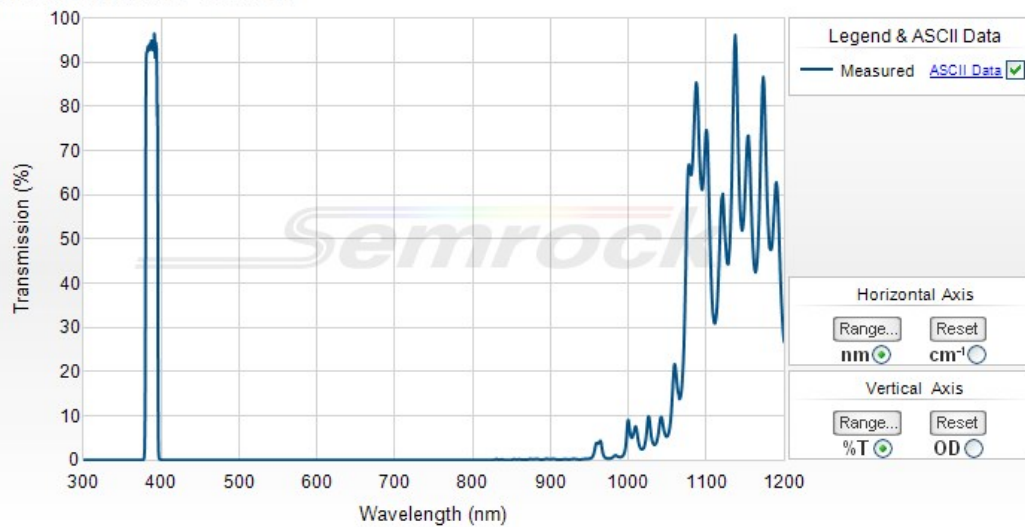

#### Semrock, Inc

3625 Buffalo Road, Suite 6  
Rochester, New York 14624

Main Phone: +1 585.594.7050 (worldwide)  
Toll Free Phone: 866.736.7625 (866-SEMROCK)  
(within US and Canada)

Your filter spectrum may differ slightly from the typical spectrum above, but is certified to meet the optical specifications noted below.



#### 387/11 nm BrightLine® single-band bandpass filter

Individual fluorescence bandpass filters that have been optimized for use in a variety of fluorescence instruments. All thin-film, hard-coated construction for unsurpassed performance and reliability.

Part Number	Size	Price <sup>1</sup>	Stock Status
FF01-387/11-25	25 mm x 5.0 mm	\$305	In Stock
FF01-387/11-25-STR	25 mm threaded ring for Sutter Lambda filter wheel	\$325	2nd Day Ship
FF01-387/11-32	32 mm x 5.0 mm	\$500	In Stock
FF01-387/11-21.8-D	21.8 mm x 2.0 mm (unmounted)	\$305	In Stock

Don't see a size you need? Contact us for custom sizing – available in less than a week (sizing fee applies).

<sup>1</sup>) US domestic pricing only. If you are ordering from outside the US, please contact your nearest [regional distributor](#) for the correct list price.

#### Optical Specifications

Specification	Value
Transmission Band 1	T <sub>avg</sub> > 90% 381.5 – 392.5 nm
Center Wavelength 1	387 nm
Guaranteed Minimum Bandwidth 1	11 nm
FWHM Bandwidth 1 (nominal)	14.8 nm
Blocking Band 1	OD <sub>avg</sub> > 5 200 – 373 nm
Blocking Band 2	OD <sub>avg</sub> > 5 403 – 417 nm
Blocking Band 3	OD <sub>avg</sub> > 10 417 – 556 nm (Design specification - <a href="#">measurements are noise-floor limited</a> )
Blocking Band 4	OD <sub>avg</sub> > 6 556 – 670 nm
Blocking Band 5	OD <sub>avg</sub> > 5 670 – 750 nm
Blocking Band 6	OD <sub>avg</sub> > 2.5 750 – 925 nm

#### General Filter Specifications

Specification	Value
Angle of Incidence	0 ± 5 degrees
Cone Half-angle	7 degrees
Optical Damage Rating	Testing has proven to show no signs of degradation when exposed to at least 6.0 W of power from an unfiltered xenon arc lamp over a 25 mm diameter (corresponding to 1.2 W/cm <sup>2</sup> ) for over 500 hrs.
Effective Index	1.92

#### Physical Filter Specifications (applies to standard sized parts; contact us regarding other sizes)

Specification	Value
---------------	-------

Transverse Dimensions (Diameter)	25 mm
Transverse Tolerance (mounted)	+ 0.0 / - 0.1 mm
Filter Thickness (Mounted)	5.0 mm
Filter Thickness Tolerance (Mounted)	± 0.1 mm
Clear Aperture	≥ 21 mm
Scratch-Dig	60-40
Substrate Thickness (unmounted)	2.0 mm
Substrate Thickness Tolerance (unmounted)	± 0.1 mm
Orientation	Arrow on ring indicates preferred direction of propagation of light